


Operating instructions



**SYN 168 h
SUL 188 h
MEM 198 h
TM 178 h**

theben

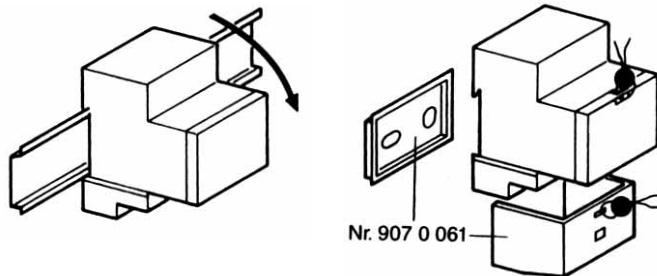

(GB)

MOUNTING INSTRUCTIONS



Safety information: Electrical devices should only be connected and mounted by an electrical specialist. Manipulations and modifications on the switch will result in loss of warranty. The national specifications and applicable safety regulations must be observed.

Synchron


230 V / 50 Hz

Quartz * R = 3d (72h) NiMh






230 V / 45 – 60 Hz

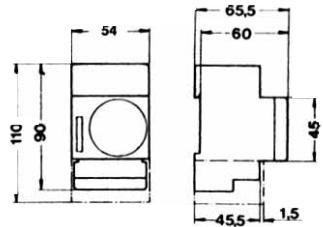



* A la mise sous tension, le mouvement à quartz démarre de lui-même au bout de quelques minutes. La réserve de marche pleine sera

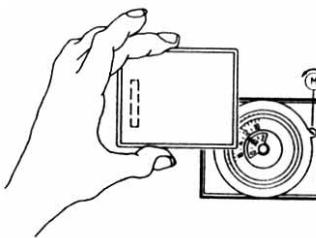


3⁰⁰

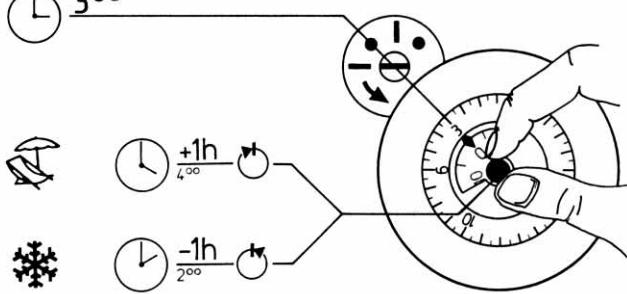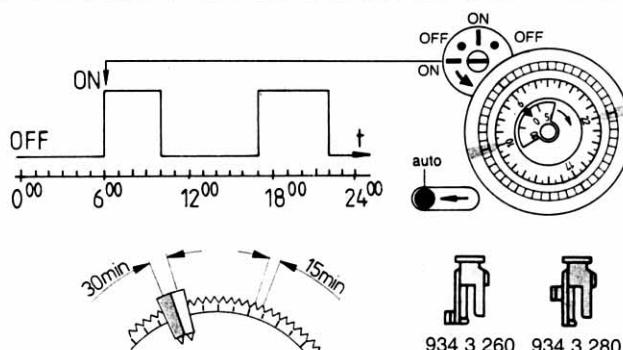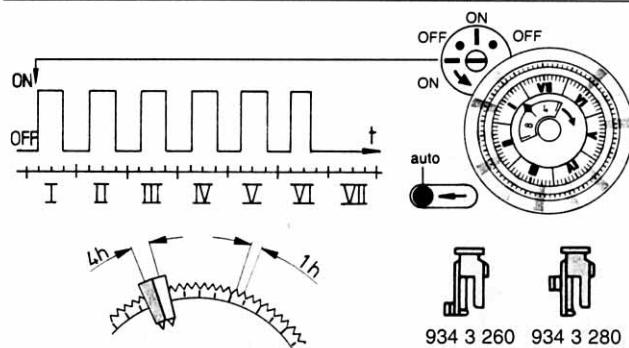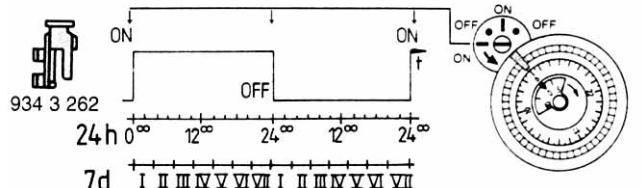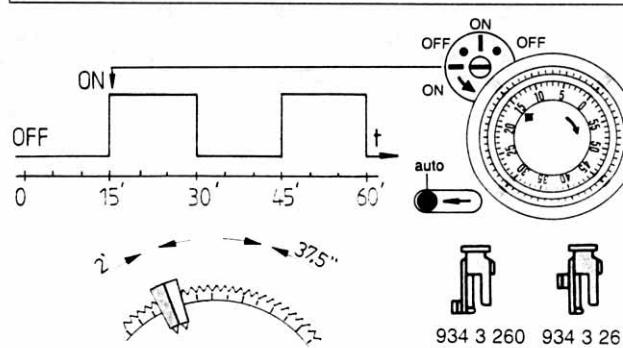**24 h Programm****7 d Programm****(Programm Order Nr. 934 3 262)****60' Programm**

Programm

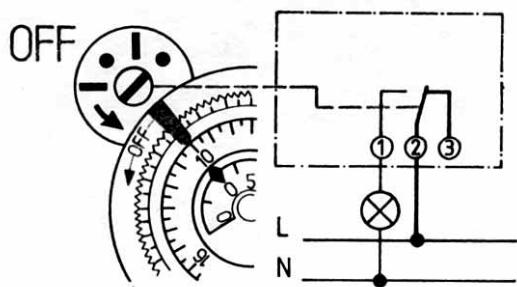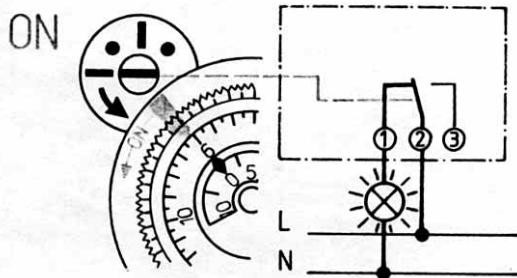


permanent ON / OFF

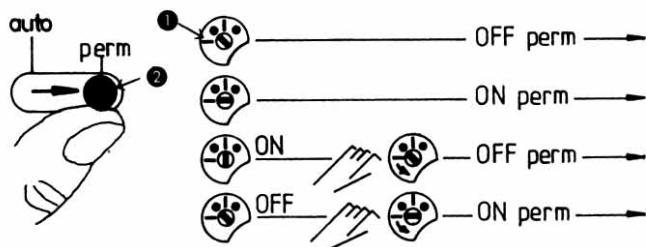

Permanent Control ON/OFF

Set the hand lever ② to "perm" = permanent control; turning the control axis ① in direction of arrow, the required permanent control ON or OFF can now be adjusted. Turning the hand lever to "Auto" = Automatic Control, the permanent control is terminated. The actual switch position is maintained until the next counteracting command of the automatic program sequence is triggered. An immediate correction can be carried out by means of the manual control (override control).

manual

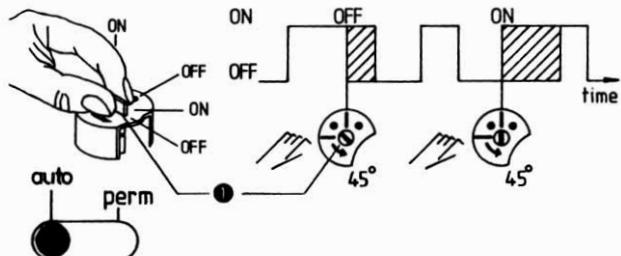

Manual Control ON/OFF (Override Control)

Turn the control axis ① in direction of arrow by one notch; ON = \leftarrow/\rightarrow or OFF = \nwarrow/\swarrow . The manual control is automatically annulled by the following counteracting command of the automatic program sequence.

EMV / CEM / EMC / ETY

GB The time switches are in accordance with the European directives 73/23/EEC (Low-Voltage Directive) and 89/336/EEC (EMC-Directive). If the time switches are used together with other devices in an installation, take care that the complete installation does not cause a radio interference.