

MPU63 SERIES

63W Desk Top Switching Power Supplies For Medical Equipment.

Description:

The MPU63 series of AC/DC switching mode power supplies provide 63 Watts of continuous output power. All supplies are UL94V-1 min compliant. They are suited for use in hospital instrument and many other applications. All models meet FCC Part-18 class B and CISPR-11 EN55011 class B emission Limits and are designed to comply with UL/c-UL(UL 60601-1:2nd Edition) ,TUV/T-mark (EN 60601-1:2nd Edition), and new CE requirements. All units are 100% burned in and tested.



Features:

- Wide Operating Voltage 90 to 264 VAC,47 to 63 Hz
- IEC-320-C14 Input Inlet
- Single Output
- Optional Output Connector (See appendix)
- Input Surge Current, Over Voltage And Over Load protection
- Output Voltage Protection(Crowbar Design)
- Energy Star 2.0, Efficiency level V
- Class I
- 3 year warranty

Safety Approvals :



Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Safety Approvals Input Voltage Range		100		240	VAC
	Operate Voltage Range		90		264	VAC
fin	Input Frequency		47		63	Hz
Po	Output Power Range	Vin=90 to 264VAC	0		63	W
Vo	Output Voltage Range		See rating chart			V
Io	Output Current Range		See rating chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115 VAC			1.62	A
Iih	Input Current (High Line)	Io=Full load, Vin=230 VAC			0.72	A
Irl	Low Line Inrush Current	Io=Full load, 25°C ,Cool start, Vin=115VAC		28	38	A
Irh	High Line Inrush Current	Io=Full load, 25°C ,Cool start, Vin= 230VAC		45	55	A
Eff	Efficiency	Io=Full Load, Vin=230VAC	77	85	88	%
REG-i	Line Regulation	Io=Full Load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC		3	7	%
OVP	Over Voltage Protection		112		132	%
OCP	Over Current Protection		110		150	%
Ttr	Time of Transient Response	Io=Full Load to Half Load,Vin=100VAC			4	mS
Thold	Hold-Up Time	Io=Full Load, Vin=110VAC	16			mS
Ts	Start Up Time	Io=Full Load, Vin=100VAC	0.3	1	2	S
Vp-p	Ripple & Noise (Peak to Peak)	Full Load, Vin=100VAC		0.5	1	%
Ilk	Safety Ground Leakage Current	Io= Full Load, Vin=240VAC			0.1	mA
Pno	No-Load Power Consumption	No load,Vin=230VAC	0.3	0.4	0.5	W
TC	Temperature Coefficient	All output	-0.04		0.04	%/°C

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		0	50	70	°C
Tstg	Storage Temperature		-40		85	°C
Ho	Operating Humidity		0		95	%
Hr	Storage Humidity		0		75	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1M			Hrs
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C					

MPU63 SERIES

63W Desk Top Switching Power Supplies For Medical Equipment.

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	5656			VDC
Vpg	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2828			VDC
Ris	Isolation Resistance	Test Voltage = 500VDC	50			MΩ
CISPR	EMI requirements for CISPR-11	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-18	Vin=110VAC	B			CLASS

Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total Regulation ^①	Maximum Output Power
MPU63-102	5 VDC	9.00 A	7%	45W
MPU63-103	7 VDC	7.85 A	7%	55W
MPU63-104	9 VDC	6.44 A	5%	58W
* MPU63-105	12 VDC	5.25 A	5%	63W
* MPU63-106	15 VDC	4.20 A	5%	63W
* MPU63-107	18 VDC	3.50 A	5%	63W
* MPU63-108	24 VDC	2.62 A	3%	63W
* MPU63-109	30 VDC	2.10 A	3%	63W
* MPU63-110	36 VDC	1.75 A	3%	63W

MPU63-103~109 had been approved by PSE.

Mark " * " means approved by CEC level V and the output cable must be using as below.

① MPU63-102~103 are required to use AWG#16 / 5C / 4FT output cable.


MPU63-104~105 are required to use AWG#16 / 2C / 4FT output cable.

MPU63-106~107 are required to use AWG#16 / 2C / 4FT output cable.

MPU63-108~110 are required to use AWG#18 / 2C / 6FT output cable.

The regulation and efficiency will be changed by modified output cable.

Mechanical Specifications:

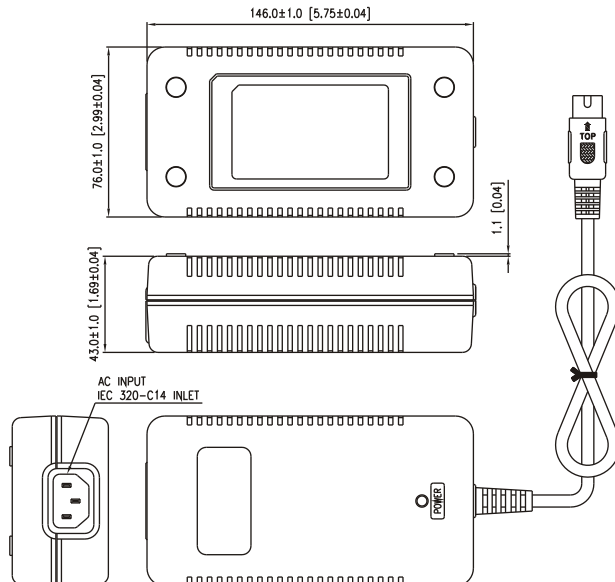

Note:

1. Dimensions are shown in inches or mm.
2. Weight: 510-560gs approx.
3. Optional output connector:
See page Appendix.